




REMOTE MONITORING AROUND THE CLOCK

SOLAX CLOUD MONITORING

Feature

- Local & Remote monitoring, setting and upgrade of batch inverters
- Intelligent export control, DRM control, ripple control and etc. of batch inverters
- Support large-capacity data storage
- Support IEC104 protocol

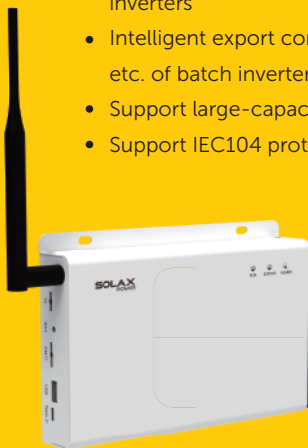

DataHub1000

| Product Name | DataHub |
|-----------------------------|--|
| Model | DataHub1000 |
| Power Adapter | 100-240V 50/60HZ 1.5A AC input 12V 2A DC output |
| Wireless Module | Wi-Fi 2.4GHz |
| Ethernet | 10/100M |
| Manage Device Quantity | 60 |
| Interface | RS485*4, CAN*1, Ethernet*1 |
| Dry Contactor | AI*2, DI*4, DO*4 |
| Data Transfer Interval | 5 mins |
| Expanded Storage Capacity | 8G/16G TF card (Optional) |
| Dimensions | 205*124*33 mm |
| Weight | 440±10g |
| Degree of Protection | IP21 |
| Operating Temperature Range | -20°C ~ +60°C |

Pocket WiFi V3.0-P



Feature

- Quick installation with "Plug & Play" function
- IP 65 dust prevention water proofing designs
- Stable data transmission and good reliability
- Offline data storage and resuming
- Multiple antenna adaptations according to the situation
- 10 second live data monitoring
- Modbus TCP support
- IEEE2030.5 support

| Product Name | Pocket LAN |
|-----------------------------|------------------|
| Model | Pocket WiFi+LAN |
| Power Supply | 5V 200mA DC |
| Wireless Module | WiFi 2.4 GHz |
| Ethernet | 10/100 M |
| Antenna Gain | 3 dBi |
| Data Transfer Interval | 5 mins |
| Dimensions | 112*45.7*28.5 mm |
| Weight | 80±10 g |
| Degree of Protection | IP65 |
| Operating Temperature Range | -35°C ~ +60°C |

| Product Name | Pocket WiFi |
|-----------------------------|--------------------|
| Model | Pocket WiFi V3.0-P |
| Power Supply | 5V 260mA DC |
| Wireless Module | WiFi 2.4GHz |
| Antenna Gain | 3dBi |
| Data Transfer Interval | 5 mins |
| Dimensions | 112*45.7*28.5 mm |
| Weight | 107±10g |
| Degree of Protection | IP65 |
| Operating Temperature Range | -35°C ~ +60°C |

Pocket WiFi+LAN




Feature

- Quick installation with "Plug & Play" function
- IP 65 dust prevention water proofing designs
- Stable data transmission and good reliability
- Offline data storage and resuming
- 10 second live data monitoring
- Modbus TCP support
- IEEE2030.5 support

Pocket WiFi+4GM

Feature

- Quick installation with "Plug & Play" function
- IP 65 dust prevention water proofing designs
- Stable data transmission and good reliability
- Offline data storage and resuming
- Multi-communication operator support
- 10 second live data monitoring
- Modbus TCP support
- IEEE2030.5 support

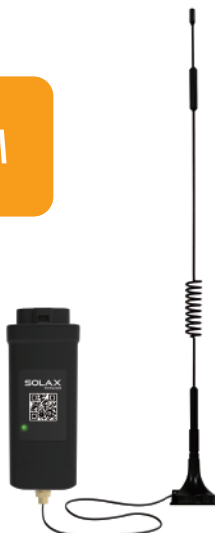

| Product Name | Pocket 4G |
|-----------------------------|---|
| Model | Pocket WiFi+4GM |
| Power Supply | 5V 200mA DC |
| Wireless Module | WiFi 2.4 GHz |
| Antenna Gain | 3 dBi |
| SIM Card Size | Nano - 4FF 12.3*8.8 mm |
| Support Band | LTE-FDD: Cat M1: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/ B20/B25/B26/B27/B28/B66/B85 Cat NB2: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/ B20/B25/B28/B66/B71/B85 |
| Data Transfer Interval | 5 mins |
| Dimensions | 112*45.7*28.5 mm |
| Weight | 124±10 g |
| Degree of Protection | IP65 |
| Operating Temperature Range | -35°C ~ +60°C |